

## BR0.65板式换热器




### 概述

BR0.65型板式冷却器采用先进的人字形不锈钢换热板片，具有换热效率高、耐腐蚀、重量轻、易修易拆、便于增减换热面积、冷热介质不易混合及介质残留少、不易结垢等特点，是一种较理想的换热冷却设备。

### 外形尺寸

型号	BR0.65
板片外形尺寸	1500x500x0.6
单片换热面积	0.65m <sup>2</sup>
板片波纹深厚	3.8mm
最大流量	255m <sup>3</sup> /h
工作压力	0.6MPa-1.6MPa
板片角孔尺寸	150mm

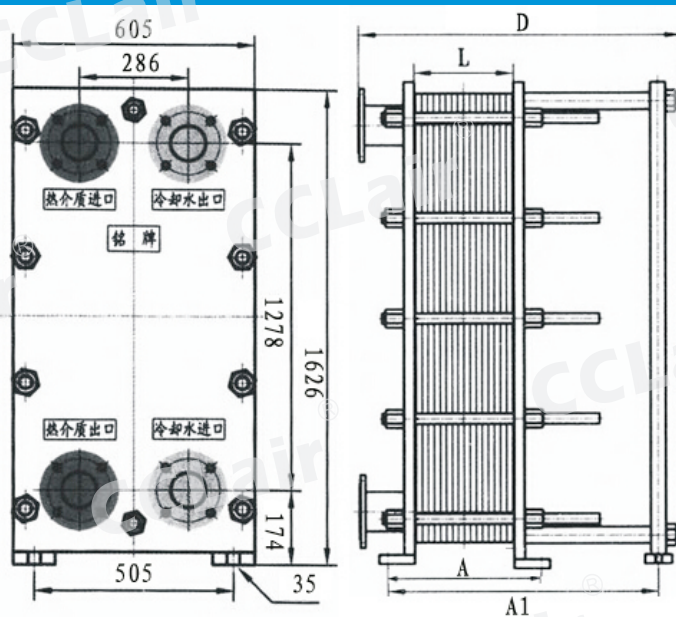

D: 双流时的法兰间距 A1: 为后支撑架式的地脚尺寸

型号	总换热面积 (m <sup>2</sup> )	板片数 (张)	L (mm)	D (mm)	A (mm)	A1 (mm)
BR0.65-35	35	54	238	558	418	711
BR0.65-40	40	62	273	593	453	763
BR0.65-45	45	70	308	628	488	815
BR0.65-50	50	77	339	659	519	860
BR0.65-55	55	85	374	694	554	913
BR0.65-60	60	92	405	725	585	958
BR0.65-65	65	100	440	760	620	1010
BR0.65-70	70	107	470	790	650	1056
BR0.65-75	75	115	506	826	686	1108
BR0.65-80	80	123	541	861	721	1160
BR0.65-90	90	138	396	716	576	1257
BR0.65-100	100	154	678	998	858	1361
BR0.65-110	110	169	744	1064	924	1459
BR0.65-115	115	177	779	1099	959	1511
BR0.65-120	120	185	814	1134	994	1563