

2WT系列膜片式常开型电磁阀



概述

先导式膜片式通电闭型
 阀体为黄铜或不锈钢
 工作压力: 0.1~0.8MPA
 额定电压: AC110V/220V/DC24V(50/60HZ)
 电压允许差: ±10%
 品牌: CCLAIR


订购码

2WT - 160 - 15 - S - N - GB - AC220V
 二方口直动式常开型 | 流量孔径 | 接管口径 | 空白: 黄铜 S: 不锈钢 | N=NBR: 丁腈橡胶(可省) V=VITON: 氟胶 E=EPDM: 三元乙丙橡胶 | GB: 隔爆 空白: 普通 | 使用电压 见下表

技术参数

型号	2WT-025-06	2WT-040-08	2WT-040-10	2WT-160-10	2WT-160-15	2WT-200-20	2WT-250-25	2WT-320-32	2WT-400-40	2WT-500-50
接管口径	1/8"	1/4"	3/8"	3/8"	1/2"	3/4"	1"	1 1/4"	1 1/2"	2"
流量通径	2.5mm 4mm		4mm	16mm	16mm	20mm	25mm	32mm	40mm	50mm
使用流体	空气、水、油、中性气体液体				电压	AC110/220V/DC24V(50/60HZ)				
动作方式	先导式				形式	常开型				
阀体材质	黄铜或不锈钢				压力	水液、空气: 0.1~0.8MPA				
密封材质	标准: NBR 80°C以下流体温度 可配: EPDM 120°C以下温度 VITON 耐弱酸弱碱或 150°C以下温度									

外形尺寸

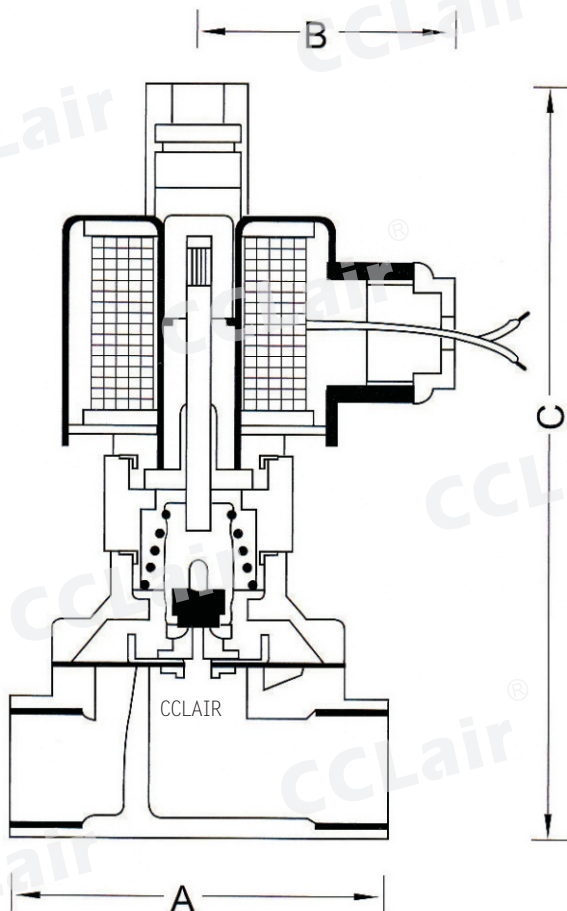

型号	A	B	C	接管口径
2WT-025-6	40	42	79	G1/8"
2WT-040-8	40	42	79	G1/4"
2WT-040-10	51	55	105	G3/8"
2WT-160-10	62	55	123	G3/8"
2WT-160-15	62	55	123	G1/2"
2WT-200-20	67	55	134	G3/4"
2WT-250-25	86	73	138	G1"
2WT-320-32	90	77	151	G1 1/4"
2WT-400-40	106	87	170	G1 1/2"
2WT-500-50	123	93	182	G2"
2WT-040-10S	69	57	140	G3/8"
2WT-160-15S	69	57	140	G1/2"
2WT-200-20S	73	57	145	G3/4"
2WT-250-25S	98	77	155	G1"
2WT-320-32S	115	87	161	G1 1/4"
2WT-400-40S	121	94	170	G1 1/2"
2WT-500-50S	168	123	195	G2"
2WT-160-15SF	107	95	170	DN15
2WT-200-20SF	107	102	170	DN20
2WT-250-25SF	138	108	185	DN25
2WT-320-32SF	149	131	220	DN32
2WT-400-40SF	160	141	240	DN40
2WT-500-50SF	186	160	260	DN50