

BR0.55板式换热器




概述

BR0.55型板式冷却器采用先进的人字形不锈钢换热板片，具有换热效率高、耐腐蚀、重量轻、易修易拆、便于增减换热面积、冷热介质不易混合及介质残留少、不易结垢等特点，是一种较理想的换热冷却设备。

外形尺寸

型号	BR0.55
板片外形尺寸	1320x500x0.6
单片换热面积	0.55m ²
板片波纹深度	3.8mm
最大流量	205m ³ /h
工作压力	0.6MPa-1.6MPa
板片角孔尺寸	150mm

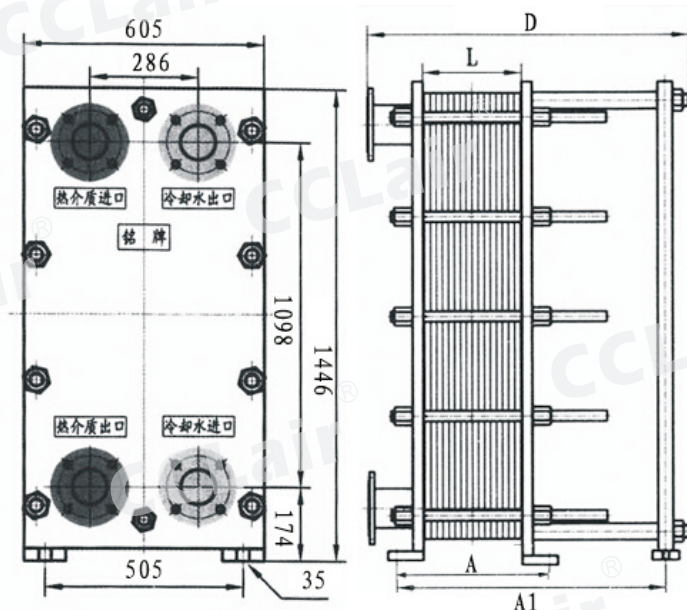

D: 双流时的法兰间距 A1: 为后支撑架式的地脚尺寸

型号	总换热面积 (m ²)	板片数 (张)	L (mm)	D (mm)	A (mm)	A1 (mm)
BR0.55-25	25	45	198	518	378	643
BR0.55-30	30	55	242	562	422	708
BR0.55-35	35	64	282	602	462	766
BR0.55-40	40	73	321	641	501	825
BR0.55-45	45	82	361	681	541	883
BR0.55-50	50	91	400	720	580	942
BR0.55-55	55	100	440	760	620	1000
BR0.55-60	60	109	480	800	660	1059
BR0.55-65	65	118	519	839	699	1117
BR0.55-70	70	127	559	879	739	1176
BR0.55-75	75	136	598	918	778	1234
BR0.55-80	80	145	638	958	818	1293
BR0.55-85	85	155	682	1002	862	1358
BR0.55-90	90	164	722	1042	902	1416