

BR0.85板式换热器




概述

BR0.85型板式冷却器采用先进的人字形不锈钢换热板片，具有换热效率高、耐腐蚀、重量轻、易修易拆、便于增减换热面积、冷热介质不易混合及介质残留少、不易结垢等特点，是一种较理想的换热冷却设备。

外形尺寸

型号	BR0.85 [®]
板片外形尺寸	1750x609x0.6
单片换热面积	0.85m ²
板片波纹深厚	3.8mm
最大流量	405m ³ /h
工作压力	0.6MPa-1.6MPa
板片角孔尺寸	200mm

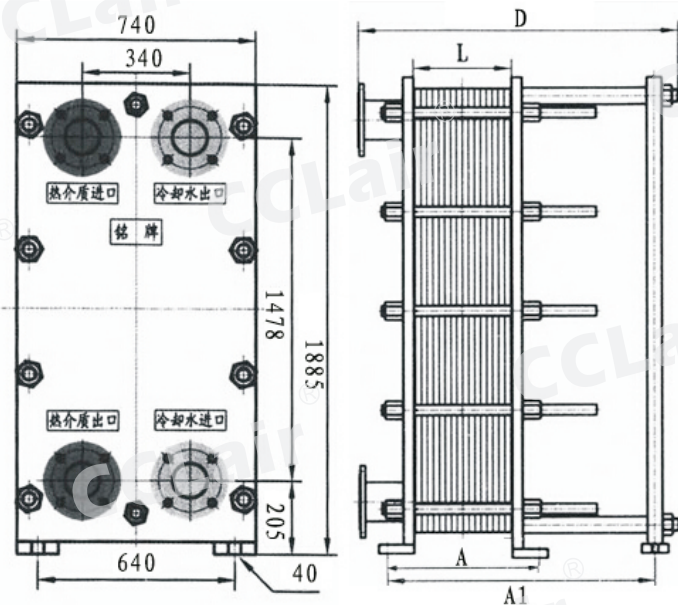

D: 双流时的法兰间距 A1:为后支撑架式的地脚尺寸

型号	总换热面积(m ²)	板片数(张)	L(mm)	D(mm)	A(mm)	A1(mm)
BR0.85-55	55	65	286	646	486	855
BR0.85-60	60	71	312	672	512	897
BR0.85-65	65	76	334	694	534	932
BR0.85-70	70	82	361	721	561	974
BR0.85-75	75	88	387	747	597	1016
BR0.85-80	80	94	414	774	624	1058
BR0.85-85	85	100	440	800	650	1100
BR0.85-90	90	106	466	826	676	1142
BR0.85-100	100	118	519	879	729	1226
BR0.85-110	110	129	568	928	778	1303
BR0.85-120	120	141	620	980	830	1387
BR0.85-135	135	159	670	1030	880	1513
BR0.85-150	150	176	774	1134	984	1632
BR0.85-165	165	194	853	1213	1063	1758
BR0.85-180	180	212	933	1293	1143	1884